# Air Tank Manifold

## Operating Instructions & Parts Manual

### for Pro-Lift Products Air Tank W-1010A & W-1005

**Model**
**W-4526**

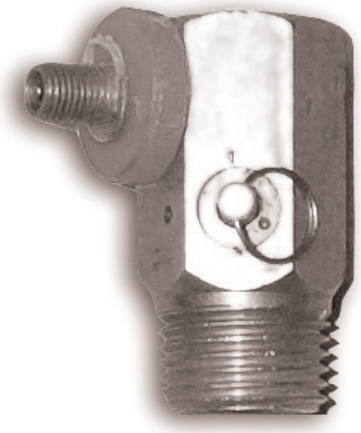

- Material: Copper
- Thread Size (on upper): V5
- Thread size (on lower): NTT 1/4”
- Max Pressure: 125 PSI

*This is the safety alert symbol. It is used to alert you to potential personal injury hazards. Obey all safety messages that follow this symbol to avoid possible injury or property damage.*

**⚠CAUTION**

*• Use only on “Pro-Lift Products” air tanks.*

*• Do not use if there are broken, bent, cracked or damaged areas found on the manifold.*

**⚠WARNING**

*• Do not exceed 125 psi, tank pressure of 85 -100 psi is recommended*

*• To prevent personal injury and/or property damage, release all pressure from the tank before removing or replacing air tank manifold*

SFA Companies ©2017
10939 N. Pomona Ave. Kansas City, MO 64153
888-332-6419

Printed in China
W-4526-M0_122017