# SERVICE JACKS

- A built-in by-pass device protects hydraulic system from over pumping damage, U.S. Patent No.5,946,912
- Metered release system allows for precise load control
- Largest saddle in category
- Extra wide wheels and solid stance designed for stability under load stress

**FAST & SAFE!**
Convenient foot pedal designed for fast, no load lifts
U.S. Patent No. 5,431,369

21025
2-1/2 Ton Capacity

21030
3 Ton Capacity

| Model | Capacity | Minimum Height | Maximum Height | Handle Length | Saddle Diameter | Jack Size Length | Jack Size Width | Jack Size Height | G.W. |
|---|---|---|---|---|---|---|---|---|---|
| **21025** | 2-1/2 Ton | 5″ | 19-1/2″ | 42-1/8″ | 5″ | 25-3/8″ | 13-1/8″ | 6-1/2″ | 73 Lbs. |
| **21030** | 3 Ton | 5-1/4″ | 19″ | | | 27-1/2″ | 13-3/8″ | 6-3/8″ | 87 Lbs. |

# LONG CHASSIS SERVICE JACKS

- Handle actuated release valve provides metered control at any desired lowering speed
- Wide stance and low center of gravity provides optimum stability under load stress
- Heavy gauge, steel frame helps prevent distortion and twisting
- A built-in by-pass device protects hydraulic system from over pumping damage, U.S. Patent No.5,946,912

**FAST & SAFE!**
Convenient foot pedal designed for fast , no load lifts.

22050C
5 Ton Capacity

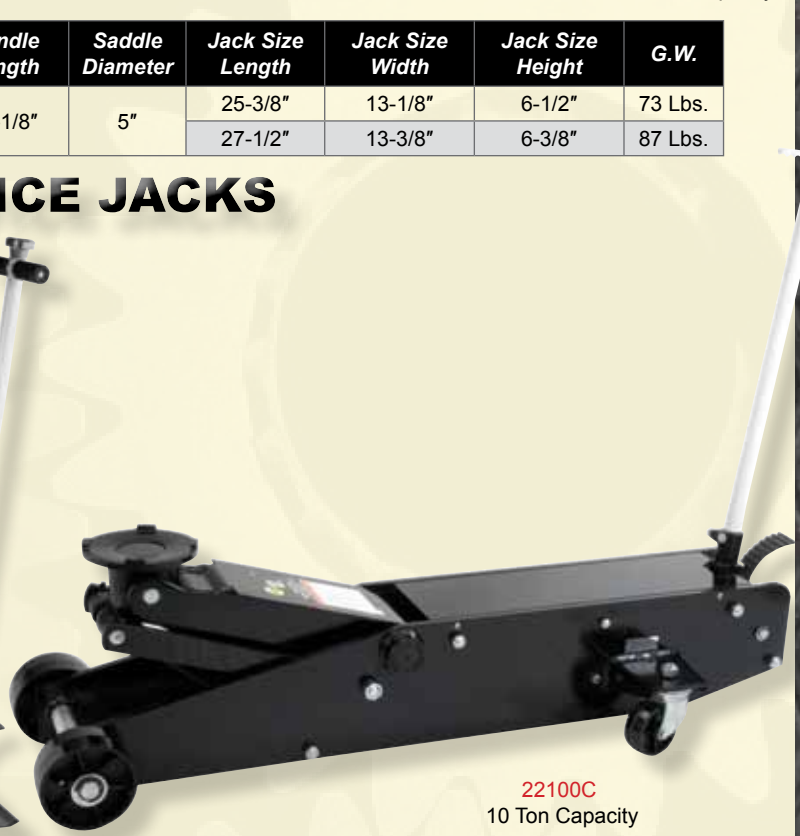

22100C
10 Ton Capacity

| Model | Capacity | Minimum Height | Maximum Height | Handle Length | Saddle Diameter | Jack Size Length | Jack Size Width | Jack Size Height | G.W. |
|---|---|---|---|---|---|---|---|---|---|
| **22040C** | 4 Ton | 5″ | 24″ | 42-5/8″ | 5-1/2″ | 50-5/8″ | 15-3/8″ | 7-1/2″ | 156 Lbs. |
| **22050C** | 5 Ton | 7″ | 27″ | | 6-1/2″ | 57-3/4″ | 17″ | 7-5/8″ | 233 Lbs. |
| **22100C** | 10 Ton | | | | 7-3/8″ | 54-3/4″ | 20″ | 12-3/4″ | 427 Lbs. |